



iTrack™

Identification Ear Tag

iTrack™ Ear Tag family provides high quality products satisfying ISO11784/785, FDX - B and HDX international standards. Furthermore, we have the fully automatic inlay product line, which is the only one in Asia. We also would like to announce that our special design could prevent tag dropping out and survive in tougher environment.

iTrack Ear Tag

- Special design to prevent ear tag dropping out.
- When the huge external force applied, Tag lid would drop out but our inlay with base will still stay on cow's ear and keep working same as before.
- Strong durability to survive from tough environment.
- Long reading distance.
- HDX/FDX-B

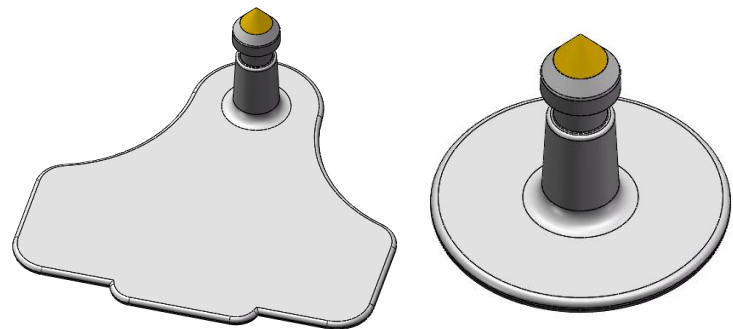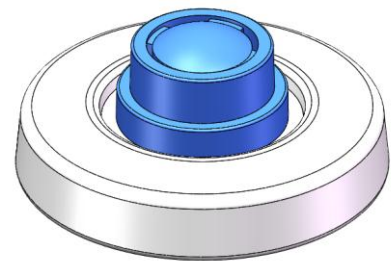

Application	cattle, sheep, lamb and pig ear tag	
R/W standard	ISO11784/5 FDX-B or HDX	
Frequency	134.2KHz/125KHz	
Operation temperature	-30°C to 50°C	
Material	TPU (Thermoplastic polyurethane)	
Dimension		
Female part ear tag		
Height	14	mm
Outer Diameter	30	mm
Inner Diameter	5	mm
Button Male part ear tag		
Height	23	mm
Outer Diameter	28	mm
Flag Male part ear tag		
Height	23	mm
Length	70	mm
Width	57	mm